


# BRAVADO ROUND

led downlight

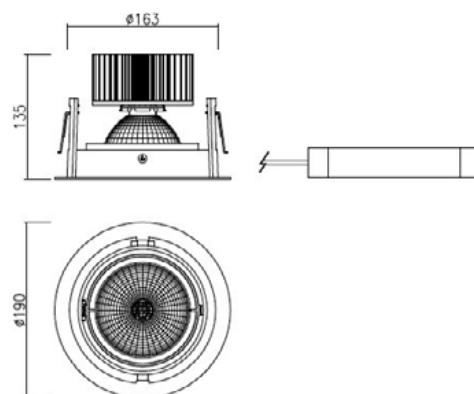

## TECHNICAL DETAILS

Light source	<b>LED SLM</b>
Colour temp	<b>3 000/4 000 K</b>
Mounting	<b>Recessed</b>
Ballast	<b>Remote</b>
Dimensions	<b>Trim 190 mm Ø, Depth: 135 mm</b>
Current	<b>300 mA–1 200 mA</b>
Tilt and rotate angle	<b>Tilt &lt;25° and Rotate &lt;350°</b>
Power	<b>Up to 44 W</b>
CRI	<b>&gt;8 ora – &gt;9 ora</b>
Lumen output	<b>Up to 4 500 lm</b>
Beam angle	<b>15° (M), 28° (W)</b>
Cut out	<b>166 mm</b>
Mean lifespan	<b>50 000 hrs @ 25°C</b>
Dimming options	<b>Phase Cut, DALI</b>
Driver/Control manufacturer	<b>Philips/Osram/Tridonic</b>
Trim colour	<b>Black/White/Grey</b>
System efficacy	<b>Upon request</b>
Light output ratio	<b>Upon request</b>