


ABACO PENDANT

hulk, standard, modest, small or baby

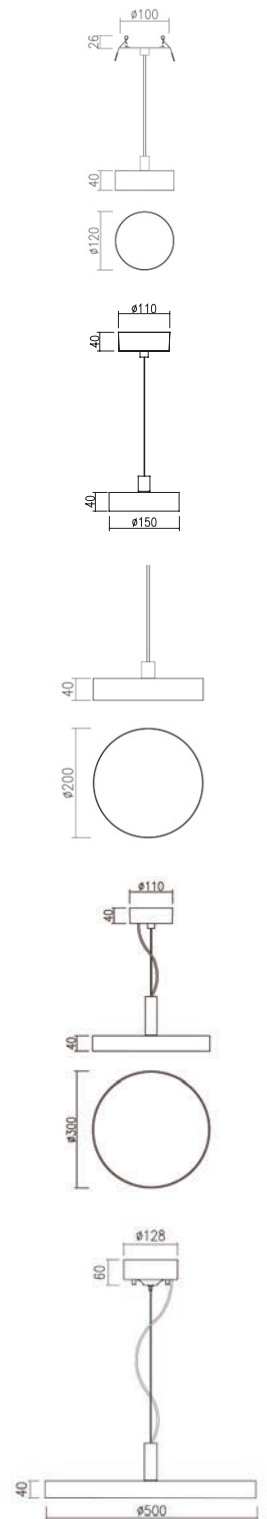

TECHNICAL DETAILS

| | |
|-----------------------------|---|
| Light source | LED |
| Lumen output | 1180, 1892, 2700, 3808, 5000lm |
| Colour temp | 3000/4000/5000K |
| Beam angle | Medium |
| Mounting | Suspended |
| Cut out | 84 mm |
| Ballast | Remote |
| Options | Surface mounted |
| Dimensions | 120,150,200, 300, 500Ø × 40 mm |
| Mean lifespan | 50,000 hours |
| Voltage | 240 |
| Dimming options | Phase cute, 1-10v, DSI, DALI Switch dim, non-dim |
| Power | 13,18,27, 36, 46W |
| Driver/Control manufacturer | Tridonic |
| CRI | 90 |
| Trim colour | White/Black/Grey |
| System efficacy | 106 lms/w |