


# TOP KAT

led track light

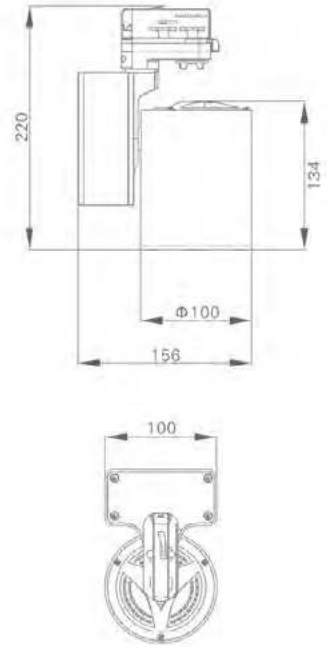

## TECHNICAL DETAILS

|                             |  |
|-----------------------------|--|
| Light source                | <b>LED</b>   |
| Colour temp                 | <b>3 000/4 000 k</b>                               |
| Mounting                    | <b>3CT Track</b>                                   |
| Ballast                     | <b>Integral</b>                                    |
| Dimensions                  | <b>H: 220 mm, 100 Ø</b>                            |
| Voltage                     | <b>240</b>   |
| CRI                         | <b>80+/90+</b>                                     |
| Tilt and rotate angle       | <b>Tilt 90°, Rotate 320°</b>                       |
| Power                       | <b>Up to 26 W</b>                                  |
| Lumen output                | <b>Up to 3 000 lm</b>                              |
| Beam angle                  | <b>15, 24, 38°</b>                                 |
| Accessories                 | <b>Surface Mount Adaptor,<br/>Honeycomb Louvre</b> |
| Mean lifespan               | <b>40 000 hrs</b>                                  |
| Driver/Control manufacturer | <b>Philips/Tridonic/Osram</b>                      |
| Trim colour                 | <b>White/Black/Grey</b>                            |
| System efficacy             | <b>Upon request</b>                                |
| Light output ratio          | <b>Upon request</b>                                |