
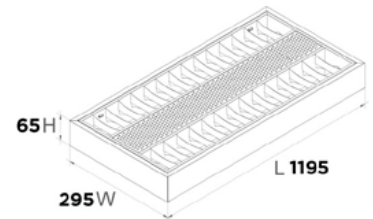


# SOLIS

aluminium louvered troffer

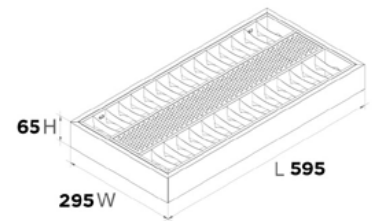

## TECHNICAL DETAILS

Light source	<b>Flourescent</b>
Colour temp	<b>3 000–6 500 K</b>
Mounting	<b>Surface/recessed/T-Bar</b>
Ballast	<b>Electronic</b>
Dimensions	<b>2 × 14 W H: 65, W: 295, L: 595</b> <b>2 × 28 W H: 65, W: 295, L: 595</b>
Voltage	<b>240 V</b>
Power	<b>2 × 14 W, 2 × 28 W</b>
Lumen output	<b>2 700–5 800</b>
Mean lifespan	<b>20 000 hrs</b>
Dimming options	<b>1–10V analog, DALI</b>
Driver/Control manufacturer	<b>VS, Osram</b>
Trim colour	<b>White</b>
System efficacy	<b>104 lm/w</b>
Light output ratio	<b>62–65%</b>
CRI	<b>82</b>