


PURE 3

recessed linear lighting

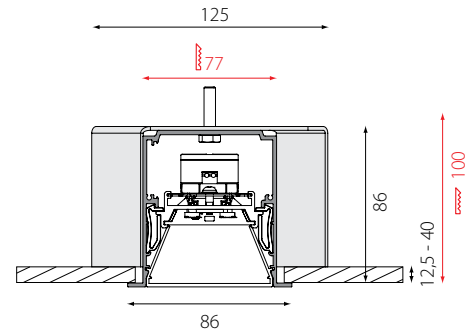

TECHNICAL DETAILS

Light Engine	High Efficiency, Nominal Mode, High Output
Colour temp	3000/3500K/4000K, dynamic white (2700K-6500K)
Mounting	Recessed
Available Lengths	611mm, 891mm, 1171mm, 1451mm, 1731mm, 2296mm, 2856mm, 3416mm, 4261mm, custom
Dimensions	86mm x 86mm
Input Voltage	240 V
Optics	Satinè, Microprism, Microprism with Microfoil
Forward Current	200 mA-400 mA
MacAdam Step	3
Cut out	77 x 100 mm
Mean lifespan	L90/50,000 hrs
Dimming options	Non-dim, DALI dim
Driver/control manufacturer	Tridonic
Trim colour	Silver, Black, White
CRI	CRI 90
Efficacy	>90 lm/W
IP Rating	IP40
Light output ratio	Upon request
Output	Direct Only